

ARES

chrome-plated




height 1462 mm, length 530 mm. Chrome-plated finish (cod. 50).

The chromed version of ARES makes this product unique and important for home furnishings. Available in 4 heights and 5 widths from 430 to 730 mm, also in the version with 50 mm connections.

With the insertion of the electric resistance (optional) it can work even in periods when the system is off.

ARES

chrome-plated

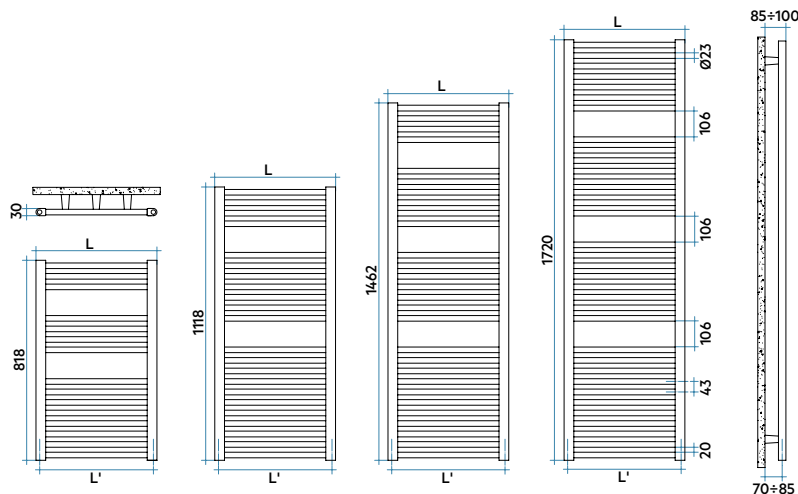

Model	Depth	Height	Width	C centre	Weight	Cap.	Thermal Power					Exp.	Mix funct.
							$\Delta t=50^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	$\Delta t=20^{\circ}\text{C}$		
	mm	mm	mm	mm	Kg	lt	Btu/h	Watt	Watt	Watt (*)	Watt	n.	Watt
818 15 rails 2 espaces	30	818	380	350	4,2	3,1	652	191	144	101	61	1,254	0
	30	818	430	400	4,5	3,4	720	211	159	110	66	1,271	0
	30	818	480	450	4,9	3,7	788	231	174	121	72	1,267	0
	30	818	530	500	5,3	4,0	855	251	189	131	79	1,263	0
	30	818	580	550	5,7	4,2	924	271	204	142	85	1,260	300
1118 22 rails 2 espaces	30	818	730	700	8,8	4,8	1128	330	250	175	105	1,249	300
	30	1118	380	350	5,9	4,5	947	278	210	147	88	1,250	300
	30	1118	430	400	6,4	4,9	1035	303	229	159	96	1,260	300
	30	1118	480	450	7,0	5,2	1140	334	252	176	106	1,257	300
	30	1118	530	500	7,5	5,6	1245	365	276	192	115	1,255	400
1462 28 rails 3 espaces	30	1118	580	550	8,1	6,0	1350	396	299	209	125	1,253	400
	30	1118	730	700	12,6	6,8	1664	488	369	258	156	1,247	400
	30	1462	380	350	7,6	5,8	1216	356	270	188	113	1,251	400
	30	1462	430	400	8,3	6,2	1318	386	293	205	124	1,244	400
	30	1462	480	450	8,9	6,8	1454	426	323	226	136	1,246	400
1720 34 rails 3 espaces	30	1462	530	500	9,6	7,2	1590	466	353	246	149	1,247	400
	30	1462	580	550	10,3	7,7	1726	506	383	267	161	1,249	400
	30	1462	730	700	16,1	8,7	2133	625	473	330	198	1,253	700
	30	1720	380	350	9,1	6,9	1478	433	328	229	138	1,248	400
	30	1720	430	400	9,9	7,5	1603	470	355	248	149	1,251	400
	30	1720	480	450	10,7	8,1	1770	519	392	274	165	1,250	400
	30	1720	530	500	11,6	8,7	1937	568	430	300	181	1,250	400
	30	1720	580	550	12,4	9,3	2104	617	467	326	196	1,249	700
	30	1720	730	700	19,4	10,5	2606	764	578	404	244	1,247	700

(*) Thanks to the high performance of Irsap ARES CHROME-PLATED radiators, the ideal Δt for low temperature projects is Δt at 30°C .

For Δt different from 50°C use the formula:

$$Q=Q_n (\Delta t / 50)^n$$

- Maximum working pressure 8 bar
- Maximum working temperature 95°C

STANDARD SUPPLY: 3 chrome-plated infratube for wall fixing; 1/2" chrome-plated air vent.

Available only in chrome-plated finish.