




height 1462 mm, length 530 mm. Standard White finish (cod. 01).

ARES, thanks to its discreet and elegant line, fits perfectly into any type of furniture. Practicality and reliability complete ARES. Available in 4 heights and 6 widths from 380 to 730 mm, also in the version with 50 mm connections.

With the insertion of the electric resistance (optional) it can work even in periods when the system is off.

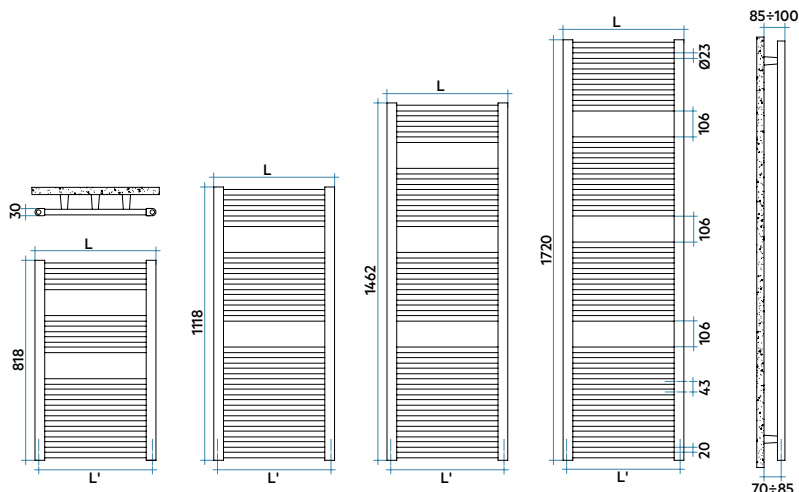

Model	Depth	Height	Width	Ccentre	Weight	Cap.	Thermal Power					Exp.	Mix
							Δt=50°C	Δt=50°C	Δt=40°C	Δt=30°C	Δt=20°C		funct.
mm	mm	mm	mm	mm	Kg	lt	Btu/h	Watt	Watt	Watt (*)	Watt	n.	Watt
818 15 rails 2 espaces	30	818	380	350	4,2	3,1	995	292	223	158	97	1,206	300
	30	818	430	400	4,5	3,4	1106	324	248	175	107	1,207	300
	30	818	480	450	4,9	3,7	1208	354	270	191	117	1,207	300
	30	818	500	470	5,1	3,8	1248	366	280	198	121	1,207	400
	30	818	530	500	5,3	4,0	1310	384	293	207	127	1,206	400
	30	818	580	550	5,7	4,2	1411	414	316	223	137	1,206	400
	30	818	600	570	5,8	4,3	1452	426	325	230	141	1,206	400
	30	818	750	720	9,0	4,8	1757	515	393	278	171	1,206	400
1118 22 rails 2 espaces	30	1118	380	350	5,9	4,5	1420	416	318	224	137	1,213	400
	30	1118	430	400	6,4	4,9	1556	456	346	243	147	1,233	400
	30	1118	480	450	7,0	5,2	1709	501	381	268	163	1,228	400
	30	1118	500	470	7,2	5,4	1774	520	395	278	169	1,227	400
	30	1118	530	500	7,5	5,6	1866	547	416	293	178	1,224	400
	30	1118	580	550	8,1	6,0	2023	593	452	318	194	1,220	400
	30	1118	600	570	8,3	6,2	2088	612	466	329	201	1,218	400
	30	1118	750	720	12,9	7,0	2556	749	572	405	248	1,205	700
1462 28 rails 3 espaces	30	1462	380	350	7,6	5,8	1846	541	412	290	176	1,223	400
	30	1462	430	400	8,3	6,2	2020	592	450	316	192	1,227	400
	30	1462	480	450	8,9	6,8	2221	651	495	348	212	1,226	700
	30	1462	500	470	9,2	7,0	2300	674	513	360	219	1,226	700
	30	1462	530	500	9,6	7,2	2422	710	540	380	231	1,225	700
	30	1462	580	550	10,3	7,7	2624	769	585	411	250	1,224	700
	30	1462	600	570	10,6	7,9	2702	792	603	424	258	1,224	700
	30	1462	750	720	16,5	8,9	3304	968	737	519	316	1,221	1000
1720 34 rails 3 espaces	30	1720	380	350	9,1	6,9	2208	647	493	347	212	1,217	700
	30	1720	430	400	9,9	7,5	2429	712	541	380	231	1,227	700
	30	1720	480	450	10,7	8,1	2668	782	595	418	255	1,225	700
	30	1720	500	470	11,1	8,3	2767	811	617	434	264	1,224	700
	30	1720	530	500	11,6	8,7	2910	853	649	457	278	1,223	700
	30	1720	580	550	12,4	9,3	3149	923	703	495	302	1,220	1000
	30	1720	600	570	12,7	9,5	3248	952	725	511	311	1,220	1000
	30	1720	750	720	19,9	10,7	3968	1163	887	626	383	1,213	1000

(*) Thanks to the high performance of Irsap ARES radiators, the ideal Δt for low temperature projects is Δt at 30°C.

For Δt different from 50°C use the formula:

$$Q=Q_n (\Delta t / 50)^n$$

Finishes available: see pag. 298.

- Maximum working pressure 8 bar
- Maximum working temperature 95°C

STANDARD SUPPLY: 3 infratube for wall fixing; 1/2" air vent.