




height 1808 mm, length 600 mm, Quartz 1 finish (cod. 1C).

NOVO is the towel warmer for excellence, specifically designed for the bathroom. With 4 heights and 4 widths it can satisfy any demand for dimensions and heating power.

With the insertion of the electric resistance (optional) it can work even in periods when the system is off.

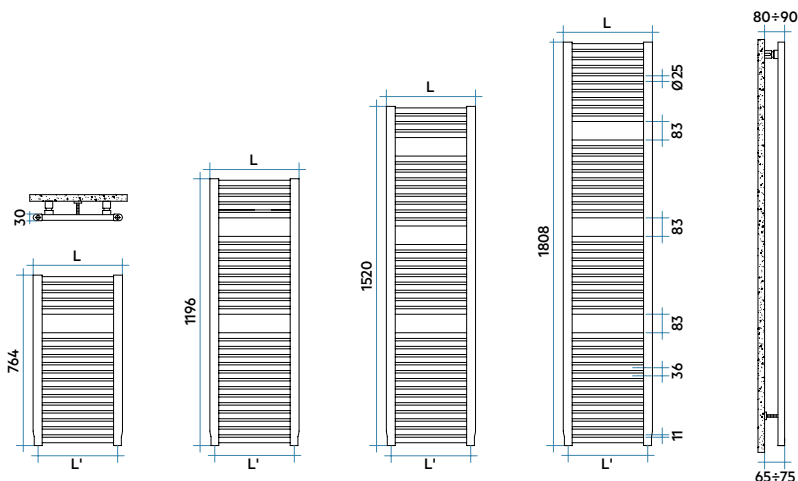

Model	Depth	Height	Width	Ccentre	Weight	Cap.	Thermal Power					Exp.	Mix
							$\Delta t=50^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	$\Delta t=20^{\circ}\text{C}$		funct.
	mm	mm	mm	mm	Kg	lt	Btu/h	Watt	Watt	Watt (*)	Watt	n.	Watt
764 19 rails 1 espace	30	764	450	406	5,6	4,4	1314	385	294	208	128	1,206	400
	30	764	500	456	6,2	4,8	1441	422	323	229	140	1,203	400
	30	764	600	556	7,2	5,6	1695	497	381	270	166	1,196	400
	30	764	750	706	10,1	6,7	2076	609	467	332	205	1,185	400
1196 29 rails 2 espaces	30	1196	450	406	8,6	6,8	1884	552	423	301	186	1,190	400
	30	1196	500	456	9,4	7,4	2086	611	469	333	205	1,190	700
	30	1196	600	556	10,9	8,7	2490	730	560	397	245	1,190	700
	30	1196	750	706	15,5	10,2	3096	908	696	494	305	1,190	1000
1520 36 rails 3 espaces	30	1520	450	406	10,8	8,5	2373	695	527	369	223	1,241	700
	30	1520	500	456	11,7	9,3	2631	771	585	409	248	1,240	700
	30	1520	600	556	13,6	10,8	3146	922	700	490	297	1,237	1000
	30	1520	750	706	19,2	12,8	3920	1149	872	612	371	1,234	1000
1808 44 rails 3 espaces	30	1808	450	406	13,0	10,3	2935	860	655	461	280	1,223	700
	30	1808	500	456	14,2	11,3	3227	946	721	508	310	1,218	1000
	30	1808	600	556	16,5	13,1	3808	1116	852	602	369	1,208	1000
	30	1808	750	706	23,4	15,5	4680	1372	1051	746	460	1,193	1000

(*) Thanks to the high performance of Irsap NOVO radiators, the ideal Δt for low temperature projects is Δt at 30°C .

For Δt different from 50°C use the formula:

$$Q=Q_n (\Delta t / 50)^n$$

- Maximum working pressure 8 bar
- Maximum working temperature 95°C

STANDARD SUPPLY: pair of chela wall brackets; wall spacers; $1/2''$ air vent.

Extension of Guarantee:

Irsap guarantees the hydraulic seal and paint of NOVO radiators for 10 years, starting with sales in 2009.

Finishes available: see pag. 298.