




height 1884 mm, length 600 mm, Quartz 1 finish (cod. 1C).

Strong personality for a reversible, modern, functional project.

This is the singular peculiarity of ODDO, a towel warmer with a frame that summarizes its functionality. The choice of the aesthetic side is personal: the visual inspiration is interpreted at the time of installation, side

with flat tube, side with rounded tube.

Available in 4 heights and 3 widths. With the insertion of the electric resistance (optional) it can work even in periods when the system is off.

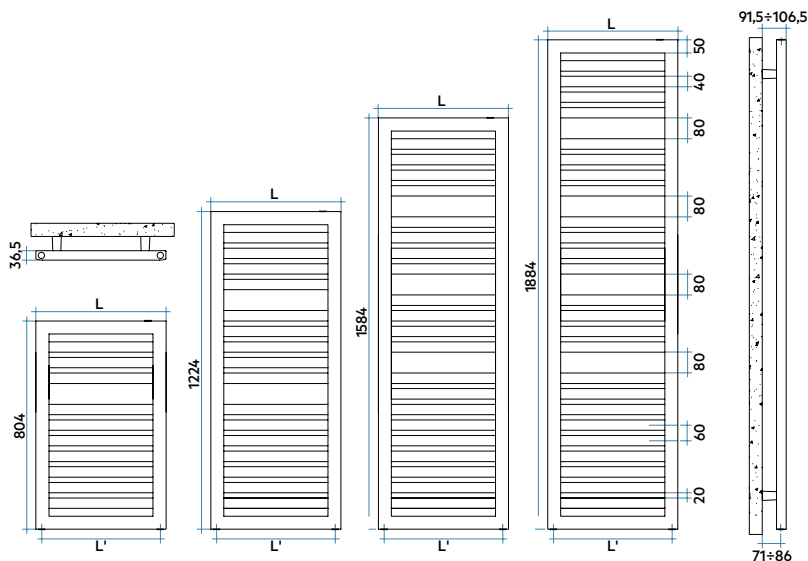

Model	Depth mm	Height mm	Width mm	Ccentre mm	Weight Kg	Cap. lt	Thermal Power					Exp. n.	Mix funct.
							$\Delta t=50^{\circ}\text{C}$ Btu/h	$\Delta t=50^{\circ}\text{C}$ Watt	$\Delta t=40^{\circ}\text{C}$ Watt	$\Delta t=30^{\circ}\text{C}$ Watt (*)	$\Delta t=20^{\circ}\text{C}$ Watt		Watt
804 10 rails 1 espace	36,5	804	450	406	8,9	5,9	1276	374	285	200	122	1,224	300
	36,5	804	500	456	9,7	6,4	1396	409	311	218	133	1,229	400
	36,5	804	600	556	11,2	7,5	1634	479	363	254	154	1,238	400
1224 16 rails 2 espaces	36,5	1224	450	406	13,1	8,7	1880	551	415	289	173	1,265	400
	36,5	1224	500	456	14,2	9,4	2061	604	455	317	190	1,265	400
	36,5	1224	600	556	16,4	10,9	2422	710	536	372	223	1,263	700
1584 21 rails 3 espaces	36,5	1584	450	406	16,6	11,0	2334	684	517	360	216	1,258	700
	36,5	1584	500	456	17,9	11,9	2569	753	569	396	238	1,259	700
	36,5	1584	600	556	20,7	13,8	3044	892	674	469	282	1,259	700
1884 25 rails 3 espaces	36,5	1884	450	406	19,4	12,9	2815	825	621	430	257	1,274	700
	36,5	1884	500	456	21,0	14,0	3081	903	680	471	281	1,273	700
	36,5	1884	600	556	24,2	16,1	3610	1058	797	553	331	1,269	1000

(*) Thanks to the high performance of Irsap ODDO radiators, the ideal Δt for low temperature projects is Δt at 30°C .

For Δt different from 50°C use the formula:

$$Q=Q_n (\Delta t / 50)^n$$

- Maximum working pressure 6 bar
- Maximum working temperature 95°C

STANDARD SUPPLY: 4 wall fixing in the same color as the radiator; air vent.

Finishes available: see pag. 298.