




height 1770 mm, length 500 mm. Quartz 1 finish (cod. 1C).

PAGE takes up the historic frame radiator and reinterprets it in its form, not only as a heating element but also as a decorative object which adds to the primary function of providing heat

to the environment that of interacting harmoniously with the space that hosts it. Available in 3 heights from 920 to 1770 mm and width of 500 mm.

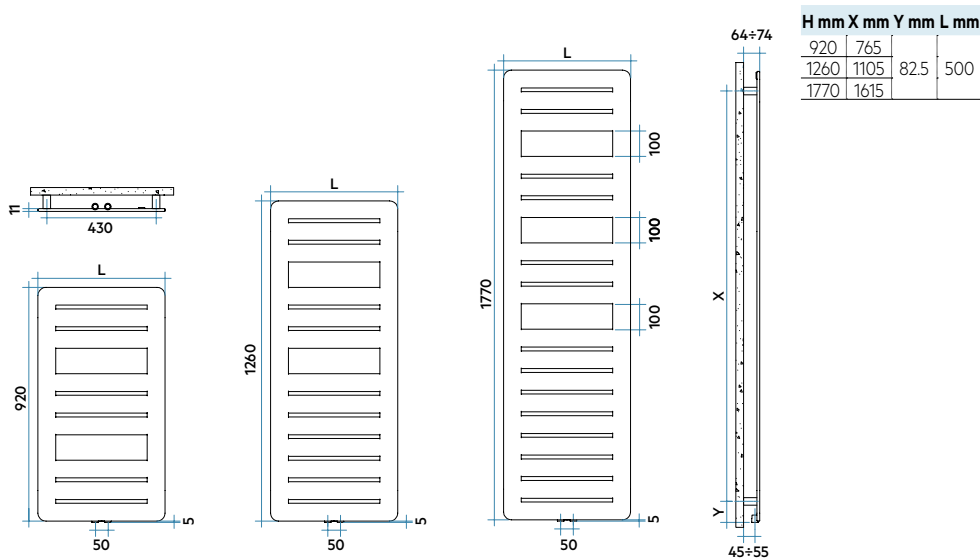

EN442-1							Thermal Power					Exp. n.
Model	Depth mm	Height mm	Width mm	C.centre mm	Weight Kg	Cap. lt	$\Delta t=50^{\circ}\text{C}$ Btu/h	$\Delta t=50^{\circ}\text{C}$ Watt	$\Delta t=40^{\circ}\text{C}$ Watt	$\Delta t=30^{\circ}\text{C}$ Watt (*)	$\Delta t=20^{\circ}\text{C}$ Watt	
920 9 rails 2 espaces	11	920	500	50	12,4	2,3	1351	396	300	209	126	1,250
1260 13 rails 2 espaces	11	1260	500	50	16,7	3,2	1815	532	403	282	171	1,240
1770 18 rails 3 espaces	11	1770	500	50	24,4	4,6	2515	737	561	395	241	1,220

(*) Thanks to the high performance of Irsap PAGE radiators, the ideal Δt for low temperature projects is Δt at 30°C .

For Δt different from 50°C use the formula:

$$Q = Q_n (\Delta t / 50)^n$$

- Maximum working pressure 4 bar
- Maximum working temperature 95°C

STANDARD SUPPLY: wall fitting; 3/8" air vent.

Finishes available: see pag. 298.