

STEP_V






8 elements, height 2000 mm, length 910 mm. Medium Grey finish (cod. 4D). Designed by Antonio Citterio with Sergio Brioschi

STEP_V is the range of vertically developed products available in multiple sizes and powers. Nine models designed to offer optimal adaptability to any type of environment and every need.

The breadth of range ensures ideal comfort in every situation.

STEP_V

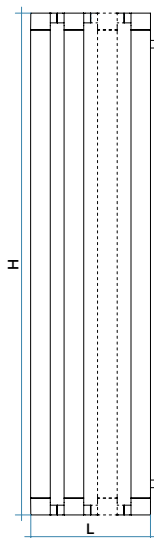

H mm	H' mm	L mm	X mm	Y mm
600	376	670	575	595
600	376	910	575	835
600	376	1150	575	1075
1800	1576	430	1775	355
1800	1576	670	1775	595
1800	1576	910	1755	835
2000	1776	430	1975	355
2000	1776	670	1975	595
2000	1766	910	1975	835



Therma Power

Model	Depth	Height	Width	C. centre	Weight	Cap.	$\Delta t=50^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	$\Delta t=20^{\circ}\text{C}$	Exp.
	mm	mm	mm	mm	Kg	lt	Btu/h	Watt	Watt	Watt (*)	Watt	n.
STEP_V_0600_06 el.	107	600	670	376	11,6	1,7	1417	415	316	221	134	1,232
STEP_V_0600_08 el.	107	600	910	376	15,6	2,2	1889	554	421	295	179	1,232
STEP_V_0600_10 el.	107	600	1150	376	19,7	2,8	2361	692	526	369	224	1,232
STEP_V_1800_04 el.	107	1800	430	1576	13,9	3,2	2376	696	529	371	225	1,234
STEP_V_1800_06 el.	107	1800	670	1576	21,1	4,8	3564	1045	793	556	337	1,234
STEP_V_1800_08 el.	107	1800	910	1576	28,3	6,4	4752	1393	1058	742	450	1,234
STEP_V_2000_04 el.	107	2000	430	1776	14,9	3,5	2609	765	580	406	246	1,238
STEP_V_2000_06 el.	107	2000	670	1776	22,6	5,3	3914	1147	871	610	369	1,238
STEP_V_2000_08 el.	107	2000	910	1776	30,4	7,1	5218	1530	1161	813	492	1,238

(*) Thanks to the high performance of Irsap STEP_V radiators, the ideal Δt for low temperature projects is Δt at 30°C.

For Δt different from 50°C use the formula:

$$Q=Q_n (\Delta t / 50)^n$$

- Maximum working pressure 4 bar
- Maximum working temperature 95°C

STANDARD SUPPLY: wall fixing systems the same finish as the radiator; 2 hidden vent valves of 1/2" and valve caps; pre-mounted hydraulic connection kit in the same finish as the radiator, complete with couplings for copper fittings (diameter 12, 14 and 15 mm), and multilayer pipes (14 x 2 thick and 16 x 2 thick).

STEP FINISHES



Chrome-plated
cod. 50



Sablé
cod. Y4



Purple Blue
cod. 1D



Hammered Grey Metallic
cod. 32



Pearl White
cod. 16



Sunstone
cod. 2D



Azurite 3
cod. 6C



Graphite Black
cod. 18



Quartz 1
cod. 1C



Tobacco Brown
cod. 1B



Medium Grey
cod. 4D



Satin Black
cod. 30



Quartz 2
cod. 2C



Flame Red
cod. 7D



Pearl Grey
cod. L6